Data sheet

Hydraulic data

Maximum operating pressure *PN*	10 bar
Head max H_{max}	12,0 m
Flow max Q_{max}	67,0 m³/h
Minimum suction head at 50 °C *m*	7 m
Minimum suction head at 95 °C *m*	15 m
Minimum suction head at 110 °C	23 m
Min. fluid temperature T_{min}	-10 °C
Max. fluid temperature T_{max}	110 °C
Min. ambient temperature T_{min}	-10 °C
Max. ambient temperature T_{max}	40 °C

Motor data

Energy efficiency index (EEI)	0,17
Mains connection	1~230 V ±10%, 50/60 Hz
Rated power P_2	1109 W
Min. speed n_{min}	500 1/min
Max. speed n_{max}	3050 1/min
Power consumption $P_{1\,min}$	20 W
Power consumption $P_{1\,max}$	1290 W
Interference emission	EN 61800-3;2004+A1;2012 /residential area (C1)
Interference immunity	EN 61800-3;2004+A1;2012 /industrial environment (C2)
Insulation class	F
Protection class	IPX4D


Installation dimensions

Pipe connection on the suction side *DNs*	DN 100
Pipe connection on the pressure side *DNd*	DN 100
Port-to-port length *L0*	360 mm

Materials


Pump housing	Cast iron
Impeller	PPS-GF40
Shaft	1.4028, DLC-coated
Bearing	Carbon, antimony-impregnated

Pump curves

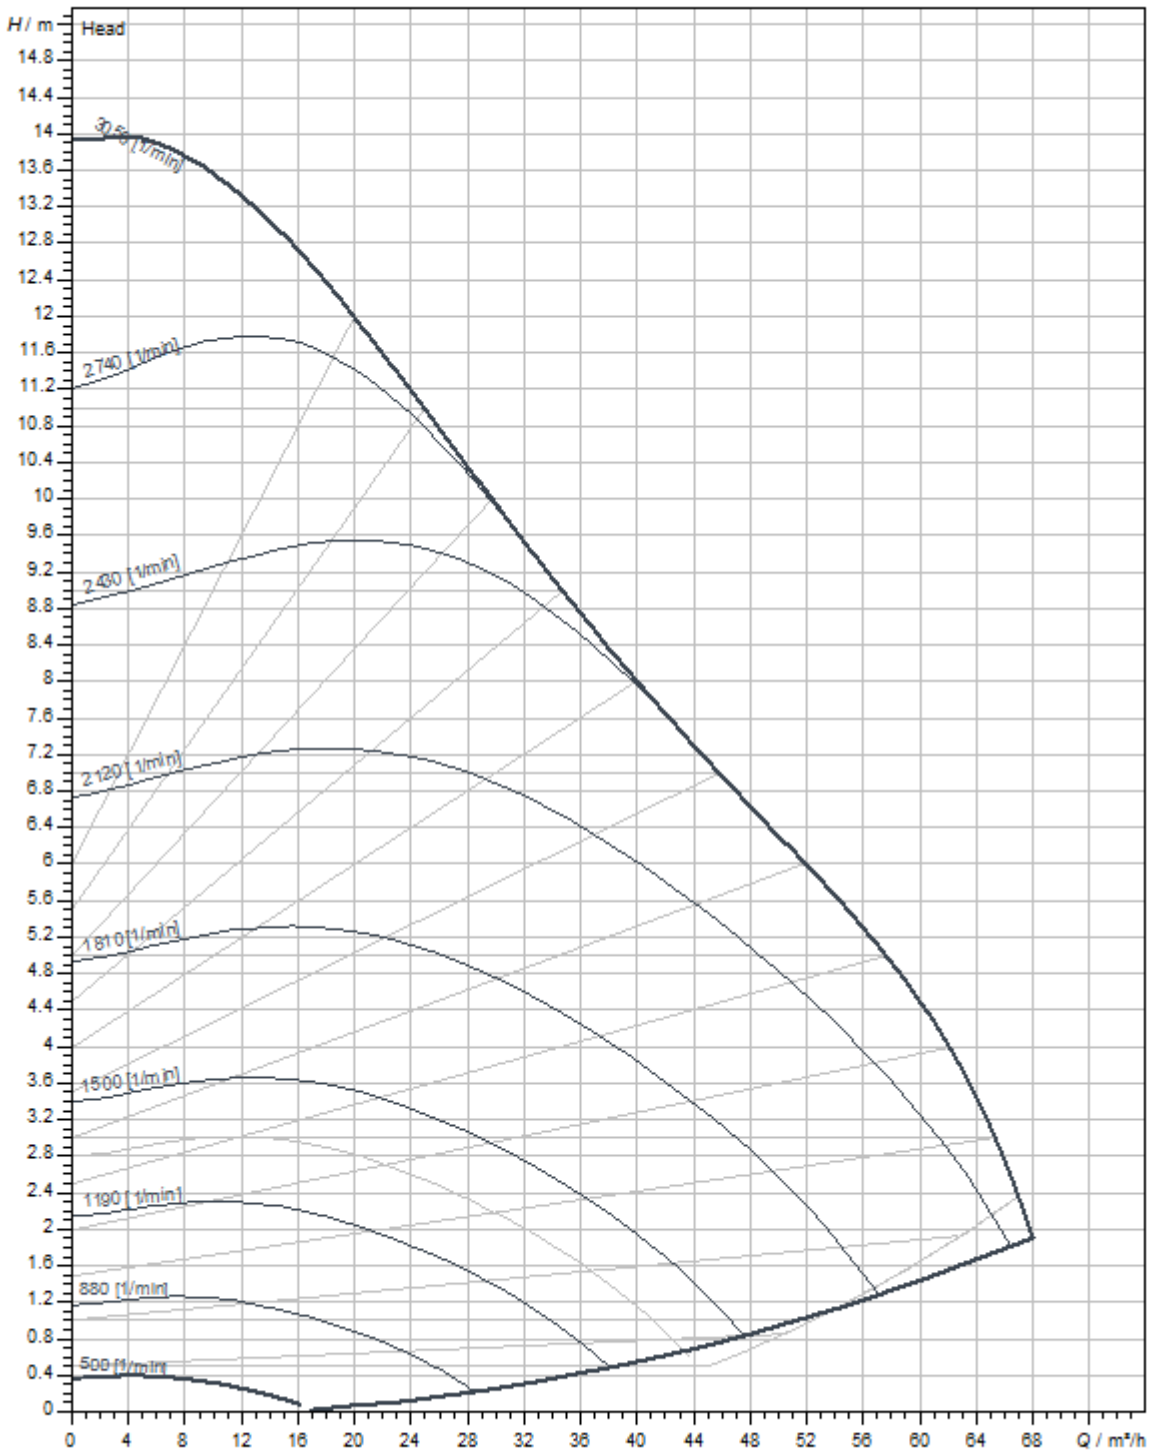
H / m
Head
2740 [1/min]
2430 [1/min]
2120 [1/min]
1810 [1/min]
1500 [1/min]
1190 [1/min]
880 [1/min]
500 [1/min]
Q / m³/h


Dimensions and dimensions drawings

Stratos MAXO 100/0,5-12 PN 10

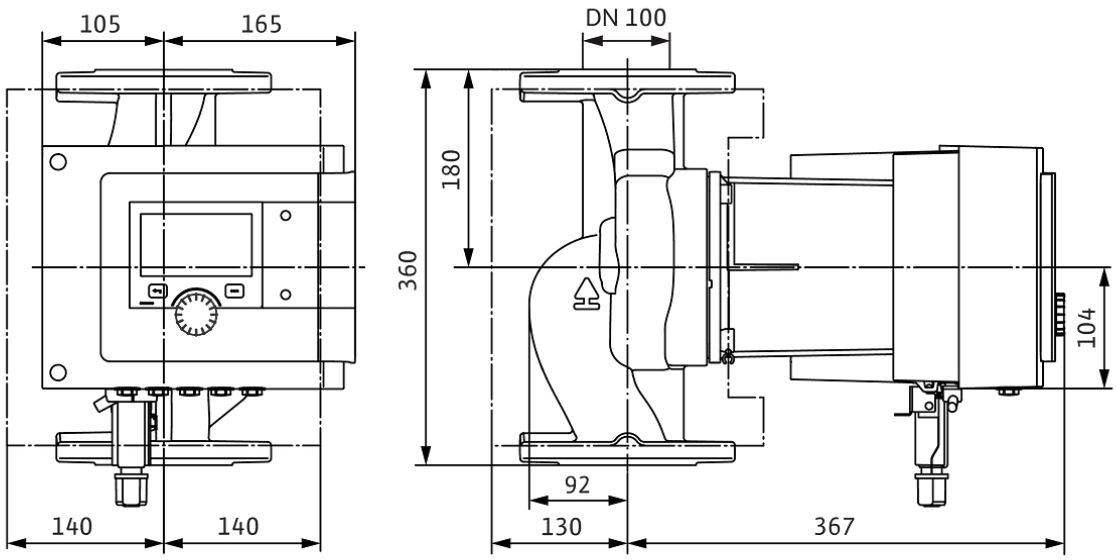

Wiring diagram

Standard: 1~ 230 V, 50/60 Hz, Option: 3~ 230 V, 50/60 Hz

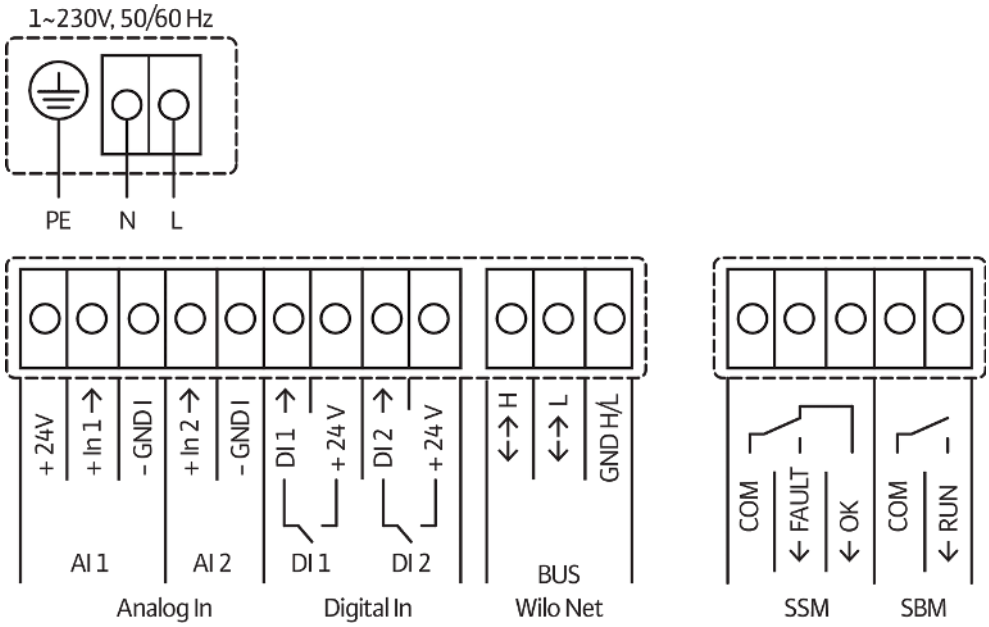

SSM: Collective fault signal (NC contact in accordance with VDI 3814, load capacity 1 A, 250 V ~)