


Series description: Wilo-Helix V

Wilo-Helix V 2204

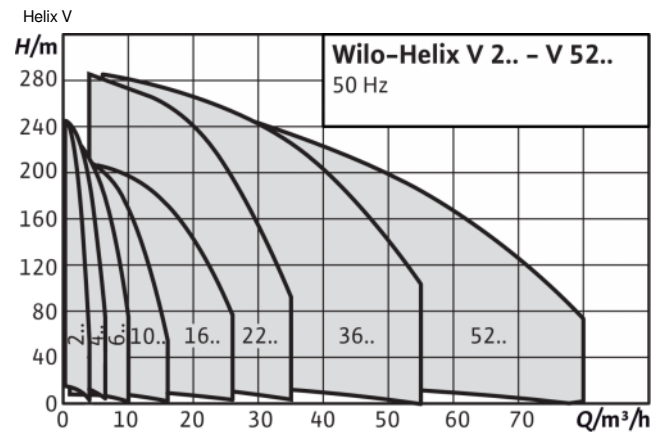

Pump curves in accordance with ISO 9906: 2012 3B

Design type

Non-self-priming, high-efficiency multistage high-pressure centrifugal pump in vertical design with in-line connections

Special features/product advantages

- Efficiency-optimised, laser-welded 2D/3D hydraulics, flow and degassing optimised
- Corrosion-resistant impellers, guide vanes and stage housings
- Flow and NPSH-optimised pump housing
- Maintenance-friendly design with particularly robust coupling guard
- Drinking water approval for pumps with parts that come in contact with the fluid made of stainless steel (EPDM version)

Series description: Wilo-Helix V

Application

- Water supply and pressure boosting
- Industrial circulation systems
- Process water
- Closed cooling circuits
- Fire extinguishing systems
- Washing systems
- Irrigation

Equipment/function

- Corrosion-resistant impellers, guide vanes and stage housings

Scope of delivery

- Helix V high-pressure multistage centrifugal pump
- Installation and operating instructions
- Helix V 2 – 16 (version PN16 with oval flanges): counter flanges made of stainless steel with the corresponding screws, nuts and gaskets

Type key

Example:	Helix V 2202/2-1/16/E/X/KS/..400-50
Helix V	Vertical high-pressure multistage centrifugal pump in in-line design
22	Flow rate in m ³ /h
02	Number of impellers
2	Number of trimmed impellers (optionally)
1	Pump material
	1 = Pump housing 1.4301 (AISI 304)
	Hydraulics 1.4307 (AISI 304L)
	2 = Pump housing 1.4409 (AISI 316L)
	Hydraulics 1.4404 (AISI 316L)
	3 = Pump housing EN-GJL-250
	(cataphoretic-coated) Hydraulics 1.4307 (AISI 304L)
	4 = Monobloc pump housing EN-GJL-250
	(cataphoretic-coated) Hydraulics 1.4307 (AISI 304L) [Only Helix VE 22.. and larger]
16	Maximum operating pressure in bar
	16 = 16 bar (PN 16 flange)
	25 = 25 bar (PN 25 flange)
	30 = 30 bar (PN 40 flange)
E	Gasket type E = EPDM V = FKM
X	"X-Care" special version
K	Cartridge type mechanical seal
S	The coupling guard is on a line with suction and discharge ports of the pump.
..	Optional
400	Connection voltage in V
50	Frequency in Hz

Technical data

- Electrical connection: 3~400 V ($\pm 10\%$), 50 Hz
 - ≤ 4 kW 230 V/ 400 V; Δ/Y
 - > 4 kW 400 V/ 690 V; Δ/Y
- Fluid temperature range:
 - Helix V 2 – 16 (EPDM): -30 to 120 °C (130 °C on request)
 - Helix V 2 – 16 for aggressive media (FKM): -15 to 90 °C
 - Helix V22 – 52 (EPDM): -20 to 120 °C (130 °C on request)
 - Helix V22 – 52 for aggressive media (FKM): -15 to 90 °C
- Max. operating pressure: 16/25/30 bar
- Protection class: IP 55
- Max. ambient temperature: +40 °C (extended temperature ranges on request)
- Available versions:
 - Helix V 2 – 16: PN 16 with oval flanges, PN 25/PN 40 with round flanges according to ISO 2531 and ISO 7005 (Victaulic coupling on request)
 - Helix V 22 – 52: PN 16/PN 25/PN 40 with round flanges according to ISO 2531 and ISO 7005

Series description: Wilo-Helix V

Materials

Helix V 2, 4, 6, 10, 16:

Standard version

- Impellers, stage housings and guide vanes made of stainless steel 1.4307 (AISI 304L)
- Pump housing made of stainless steel 1.4301 (AISI 304)
- Baseplate and lantern in EN-GJL-250 (cataphoretic coated)
- Shaft made of stainless steel 1.4301 (AISI 304) or 1.4462 (AISI 318LN) (depending on version)
- Sleeve under the mechanical seal 1.4404 (AISI 316L)
- O-ring of EPDM (FKM gasket on request)
- Jacket pipe made of stainless steel 1.4301 (AISI 304)

For aggressive media

- Impellers, stage housings and guide vane apparatuses of stainless steel 1.4404 (AISI 316L)
- Pump housing made of stainless steel 1.4404 (AISI 316L)
- Shaft made of stainless steel 1.4404 (AISI 316L) or 1.4462 (AISI 318LN) (depending on version)
- Sleeve under the mechanical seal 1.4404 (AISI 316L)
- O-ring of FKM (EPDM gasket on request)
- Jacket pipe made of stainless steel 1.4404 (AISI 316L)

Helix V 22, 36, 52:

Standard version

- Stage housings, impellers, guide vane apparatuses made of stainless steel 1.4307 (AISI 304L)
- Pump housing made of stainless steel 1.4308 (AISI 304) or cataphoretic-coated grey cast iron EN-GJL 250, loose flanges made of cataphoretic-coated grey cast iron EN-GJL 250 for Helix V 22 / EN-GJS 400 for Helix V 36-52.
- Shaft made of stainless steel 1.4057 (AISI 431)
- Sleeve under the mechanical seal 1.4404 (AISI 316L)
- O-ring of EPDM (FKM gasket on request)
- Jacket pipe made of stainless steel 1.4301 (AISI 304)


For aggressive media

- Stage housings, impellers, and guide vane apparatuses made of stainless steel 1.4404 (AISI 316L)
- Pump housing: all parts which come in contact with the media are made of cast stainless steel 1.4409 (AISI 316L); loose flanges of cataphoretic-coated grey cast iron EN-GJL 250 for Helix V 22 / EN-GJS 400 for Helix V 36-52.
- Baseplate made of stainless steel 1.4301 (AISI 304)
- Shaft made of stainless steel 1.4404 (AISI 316L) or 1.4462 (AISI 318LN) (depending on version)
- Sleeve under the mechanical seal 1.4404 (AISI 316L)
- O-ring of FKM (EPDM gasket on request)
- Pressure shroud made of stainless steel 1.4404 (AISI 316L)

Description/construction

- Pumps can be adapted to specific circumstances on request (e.g. motor protection, ATEX, extended ambient temperature range).
- The Helix series is also available with an integrated frequency converter.

Duty chart: Wilo-Helix V

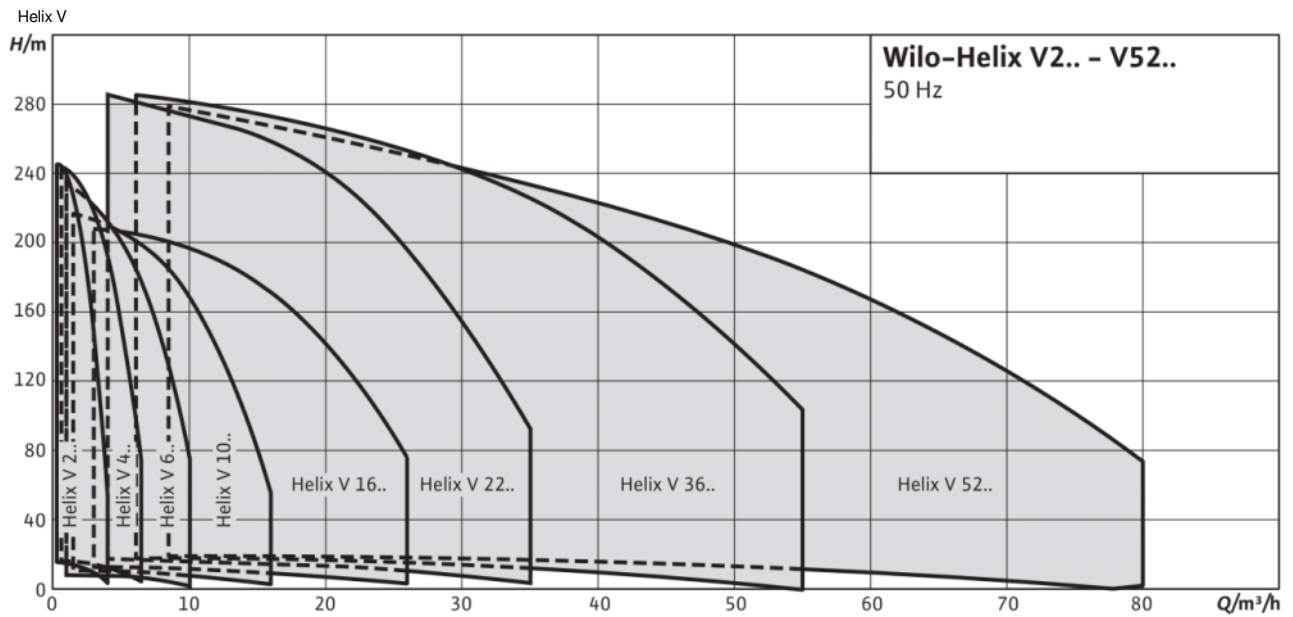

Pump curves in accordance with ISO 9906: 2012 3B

Product list: Wilo-Helix V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix V 5210/X-2/30/V/X	37.00 kW	DN 80	368.0 kg	4165855
Helix V 5210/2/X-2/30/V/X	37.00 kW	DN 80	368.0 kg	4165852
Helix V 5209/X-2/30/V/X	37.00 kW	DN 80	362.0 kg	4165849
Helix V 3611/X-2/30/V/X	37.00 kW	DN 65	349.0 kg	4165840
Helix V 3611/2/X-2/30/V/X	30.00 kW	DN 65	348.0 kg	4165837
Helix V 3610/X-2/30/V/X	30.00 kW	DN 65	344.0 kg	4165834
Helix V 2216/X-2/30/V/X	22.00 kW	DN 50	266.0 kg	4165827
Helix V 2215/X-2/30/V/X	18.50 kW	DN 50	263.0 kg	4165824
Helix V 2214/X-2/30/V/X	18.50 kW	DN 50	260.0 kg	4165821
Helix V 5210/X-3/30/E/X	37.00 kW	DN 80	368.0 kg	4165818
Helix V 5210/2/X-3/30/E/X	37.00 kW	DN 80	368.0 kg	4165815
Helix V 5209/X-3/30/E/X	37.00 kW	DN 80	362.0 kg	4165812
Helix V 3611/X-3/30/E/X	37.00 kW	DN 65	349.0 kg	4165803
Helix V 3611/2/X-3/30/E/X	30.00 kW	DN 65	348.0 kg	4165800
Helix V 3610/X-3/30/E/X	30.00 kW	DN 65	344.0 kg	4165797
Helix V 2216/X-3/30/E/X	22.00 kW	DN 50	266.0 kg	4165790
Helix V 2215/X-3/30/E/X	18.50 kW	DN 50	263.0 kg	4165787
Helix V 2214/X-3/30/E/X	18.50 kW	DN 50	260.0 kg	4165784
Helix V 5209/2/X-2/25/V/X	37.00 kW	DN 80	361.0 kg	4155483
Helix V 5208/X-2/25/V/X	30.00 kW	DN 80	355.0 kg	4155482
Helix V 5208/2/X-2/25/V/X	30.00 kW	DN 80	355.0 kg	4155481
Helix V 5207/X-2/25/V/X	30.00 kW	DN 80	351.0 kg	4155480
Helix V 5207/2/X-2/25/V/X	30.00 kW	DN 80	351.0 kg	4155479
Helix V 5206/X-2/25/V/X	22.00 kW	DN 80	276.0 kg	4155478
Helix V 5206/2/X-2/25/V/X	22.00 kW	DN 80	276.0 kg	4155477
Helix V 5205/X-2/25/V/X	18.50 kW	DN 80	276.0 kg	4155476
Helix V 5205/2/X-2/25/V/X	18.50 kW	DN 80	276.0 kg	4155475
Helix V 5204/X-2/25/V/X	15.00 kW	DN 80	265.0 kg	4155474
Helix V 5204/2/X-2/25/V/X	15.00 kW	DN 80	265.0 kg	4155473
Helix V 5203/X-2/25/V/X	11.00 kW	DN 80	183.0 kg	4155472
Helix V 5203/2/X-2/25/V/X	11.00 kW	DN 80	183.0 kg	4155471
Helix V 5202/X-2/16/V/X	7.50 kW	DN 80	145.0 kg	4155470
Helix V 5202/2/X-2/16/V/X	5.50 kW	DN 80	132.0 kg	4155469
Helix V 5201/X-2/16/V/X	4.00 kW	DN 80	108.0 kg	4155468
Helix V 5209/2/X-3/25/E/X	37.00 kW	DN 80	361.0 kg	4155466
Helix V 5208/X-3/25/E/X	30.00 kW	DN 80	355.0 kg	4155465
Helix V 5208/2/X-3/25/E/X	30.00 kW	DN 80	355.0 kg	4155464
Helix V 5207/X-3/25/E/X	30.00 kW	DN 80	352.0 kg	4155463
Helix V 5207/2/X-3/25/E/X	30.00 kW	DN 80	352.0 kg	4155462
Helix V 5206/X-3/25/E/X	22.00 kW	DN 80	276.0 kg	4155461
Helix V 5206/2/X-3/25/E/X	22.00 kW	DN 80	276.0 kg	4155460
Helix V 5205/X-3/25/E/X	18.50 kW	DN 80	276.0 kg	4155459
Helix V 5205/2/X-3/25/E/X	18.50 kW	DN 80	276.0 kg	4155458
Helix V 5204/X-3/25/E/X	15.00 kW	DN 80	265.0 kg	4155457
Helix V 5204/2/X-3/25/E/X	15.00 kW	DN 80	265.0 kg	4155456
Helix V 5203/X-3/25/E/X	11.00 kW	DN 80	183.0 kg	4155455
Helix V 5203/2/X-3/25/E/X	11.00 kW	DN 80	183.0 kg	4155454

Product list: Wilo-Helix V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix V 3610/2/X-2/25/V/X	30.00 kW	DN 65	343.0 kg	4155407
Helix V 3609/X-2/25/V/X	30.00 kW	DN 65	340.0 kg	4155406
Helix V 3609/2/X-2/25/V/X	30.00 kW	DN 65	340.0 kg	4155405
Helix V 3608/X-2/25/V/X	22.00 kW	DN 65	266.0 kg	4155404
Helix V 3608/2/X-2/25/V/X	22.00 kW	DN 65	266.0 kg	4155403
Helix V 3607/X-2/25/V/X	22.00 kW	DN 65	263.0 kg	4155402
Helix V 3607/2/X-2/25/V/X	18.50 kW	DN 65	264.0 kg	4155401
Helix V 3606/X-2/25/V/X	18.50 kW	DN 65	261.0 kg	4155400
Helix V 3606/2/X-2/25/V/X	15.00 kW	DN 65	257.0 kg	4155399
Helix V 3605/X-2/25/V/X	15.00 kW	DN 65	225.0 kg	4155398
Helix V 3605/2/X-2/25/V/X	15.00 kW	DN 65	225.0 kg	4155397
Helix V 3604/X-2/25/V/X	11.00 kW	DN 65	172.0 kg	4155396
Helix V 3604/2/X-2/25/V/X	11.00 kW	DN 65	172.0 kg	4155395
Helix V 3603/X-2/25/V/X	9.00 kW	DN 65	152.0 kg	4155394
Helix V 3610/2/X-3/25/E/X	30.00 kW	DN 65	343.0 kg	4155386
Helix V 3609/X-3/25/E/X	30.00 kW	DN 65	340.0 kg	4155385
Helix V 3609/2/X-3/25/E/X	30.00 kW	DN 65	340.0 kg	4155384
Helix V 3608/X-3/25/E/X	22.00 kW	DN 65	266.0 kg	4155383
Helix V 3601/X-3/16/E/X	3.00 kW	DN 65	101.0 kg	4155367
Helix V 3601/1/X-3/16/E/X	2.20 kW	DN 65	88.0 kg	4155366
Helix V 2213/X-2/25/V/X	18.50 kW	DN 50	256.0 kg	4147541
Helix V 2212/X-2/25/V/X	15.00 kW	DN 50	243.0 kg	4147540
Helix V 2211/X-2/25/V/X	15.00 kW	DN 50	241.0 kg	4147539
Helix V 2210/X-2/25/V/X	15.00 kW	DN 50	239.0 kg	4147538
Helix V 2209/X-2/25/V/X	11.00 kW	DN 50	165.0 kg	4147537
Helix V 2208/X-2/25/V/X	11.00 kW	DN 50	163.0 kg	4147536
Helix V 2207/X-2/25/V/X	9.00 kW	DN 50	145.0 kg	4147535
Helix V 2206/X-2/25/V/X	7.50 kW	DN 50	127.0 kg	4147534
Helix V 2205/X-2/25/V/X	7.50 kW	DN 50	125.0 kg	4147533
Helix V 2204/X-2/25/V/X	5.50 kW	DN 50	111.0 kg	4147532
Helix V 2203/X-2/16/V/X	4.00 kW	DN 50	96.0 kg	4147531
Helix V 2202/X-2/16/V/X	3.00 kW	DN 50	93.0 kg	4147530
Helix V 2201/X-2/16/V/X	1.50 kW	DN 50	78.0 kg	4147529
Helix V 2213/X-3/25/E/X	18.50 kW	DN 50	256.0 kg	4147528
Helix V 2212/X-3/25/E/X	15.00 kW	DN 50	243.0 kg	4147527
Helix V 2211/X-3/25/E/X	15.00 kW	DN 50	241.0 kg	4147526
Helix V 2210/X-3/25/E/X	15.00 kW	DN 50	239.0 kg	4147525
Helix V 2209/X-3/25/E/X	11.00 kW	DN 50	165.0 kg	4147524
Helix V 2208/X-3/25/E/X	11.00 kW	DN 50	163.0 kg	4147523
Helix V 2207/X-3/25/E/X	9.00 kW	DN 50	145.0 kg	4147522
Helix V 2206/X-3/25/E/X	7.50 kW	DN 50	127.0 kg	4147521
Helix V 2205/X-3/25/E/X	7.50 kW	DN 50	125.0 kg	4147520
Helix V 2204/X-3/25/E/X	5.50 kW	DN 50	111.0 kg	4147519
Helix V 2203/X-3/16/E/X	4.00 kW	DN 50	96.0 kg	4147518
Helix V 2202/X-3/16/E/X	3.00 kW	DN 50	93.0 kg	4147517
Helix V 2201/X-3/16/E/X	1.50 kW	DN 50	78.0 kg	4147516
Helix V 5210-2/30/V/KS	37.00 kW	DN 80	368.0 kg	4165853

Product list: Wilo-Helix V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix V 5210/2-2/30/V/KS	37.00 kW	DN 80	368.0 kg	4165850
Helix V 5209/2-2/30/V/KS	37.00 kW	DN 80	362.0 kg	4165847
Helix V 5209/2-1/25/E/KS	37.00 kW	DN 80	351.0 kg	4198510
Helix V 5208-1/25/E/KS	30.00 kW	DN 80	345.0 kg	4198509
Helix V 5208/2-1/25/E/KS	30.00 kW	DN 80	345.0 kg	4198508
Helix V 5207-1/25/E/KS	30.00 kW	DN 80	341.0 kg	4198507
Helix V 5207/2-1/25/E/KS	30.00 kW	DN 80	341.0 kg	4198506
Helix V 5206-1/25/E/KS	22.00 kW	DN 80	263.0 kg	4198505
Helix V 5206/2-1/25/E/KS	22.00 kW	DN 80	263.0 kg	4198504
Helix V 5205-1/25/E/KS	18.50 kW	DN 80	261.0 kg	4198502
Helix V 5209/2-2/25/V	37.00 kW	DN 80	360.0 kg	4150923
Helix V 5208-2/25/V	30.00 kW	DN 80	354.0 kg	4150922
Helix V 5208/2-2/25/V	30.00 kW	DN 80	354.0 kg	4150921
Helix V 5207-2/25/V	30.00 kW	DN 80	350.0 kg	4150920
Helix V 5207/2-2/25/V	30.00 kW	DN 80	350.0 kg	4150919
Helix V 5206-2/25/V	22.00 kW	DN 80	275.0 kg	4150918
Helix V 5206/2-2/25/V	22.00 kW	DN 80	275.0 kg	4150917
Helix V 5205-2/25/V	18.50 kW	DN 80	275.0 kg	4150915
Helix V 5205/2-2/25/V	18.50 kW	DN 80	275.0 kg	4150914
Helix V 5204-2/25/V	15.00 kW	DN 80	264.0 kg	4150913
Helix V 5204/2-2/25/V	15.00 kW	DN 80	264.0 kg	4150912
Helix V 5203-2/25/V	11.00 kW	DN 80	182.0 kg	4150911
Helix V 5203/2-2/25/V	11.00 kW	DN 80	182.0 kg	4150910
Helix V 5206/2-4/16/E/KS/	22.00 kW	DN 80	261.0 kg	4183450
Helix V 5205-4/16/E/KS/	18.50 kW	DN 80	257.0 kg	4183435
Helix V 5205/2-4/16/E/KS/	18.50 kW	DN 80	257.0 kg	4183434
Helix V 5204-4/16/E/KS/	15.00 kW	DN 80	242.0 kg	4183433
Helix V 5204/2-4/16/E/KS/	15.00 kW	DN 80	242.0 kg	4183432
Helix V 5203-4/16/E/S/	11.00 kW	DN 80	139.0 kg	4183431
Helix V 5203/2-4/16/E/S/	11.00 kW	DN 80	139.0 kg	4183430
Helix V 5202-4/16/E/S/	7.50 kW	DN 80	115.0 kg	4183429
Helix V 5202/2-4/16/E/S/	5.50 kW	DN 80	105.0 kg	4183428
Helix V 5206/2-1/16/E/KS	22.00 kW	DN 80	263.0 kg	4198503
Helix V 5205-1/16/E/KS	18.50 kW	DN 80	261.0 kg	4198501
Helix V 5205/2-1/16/E/KS	18.50 kW	DN 80	261.0 kg	4198500
Helix V 5204-1/16/E/KS	15.00 kW	DN 80	219.0 kg	4198499
Helix V 5204/2-1/16/E/KS	15.00 kW	DN 80	219.0 kg	4198498
Helix V 5203-1/16/E/KS	11.00 kW	DN 80	154.0 kg	4198497
Helix V 5203/2-1/16/E/KS	11.00 kW	DN 80	154.0 kg	4198496
Helix V 5202-1/16/E/KS	7.50 kW	DN 80	149.0 kg	4198495
Helix V 5202/2-1/16/E/KS	5.50 kW	DN 80	115.0 kg	4198494
Helix V 5201-1/16/E/KS	4.00 kW	DN 80	100.0 kg	4198493
Helix V 5201/1-1/16/E/KS	3.00 kW	DN 80	102.0 kg	4198492
Helix V 5201/1/X-2/16/V/X	3.00 kW	DN 80	113.0 kg	4155467
Helix V 5206/2-2/16/V	22.00 kW	DN 80	275.0 kg	4150916
Helix V 5205-2/16/V	18.50 kW	DN 80	275.0 kg	4150909
Helix V 5205/2-2/16/V	18.50 kW	DN 80	275.0 kg	4150908

Product list: Wilo-Helix V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix V 5204-2/16/V	15.00 kW	DN 80	264.0 kg	4150907
Helix V 5204/2-2/16/V	15.00 kW	DN 80	264.0 kg	4150906
Helix V 5203-2/16/V	11.00 kW	DN 80	182.0 kg	4150905
Helix V 5203/2-2/16/V	11.00 kW	DN 80	182.0 kg	4150904
Helix V 5202-2/16/V	7.50 kW	DN 80	144.0 kg	4150903
Helix V 5202/2-2/16/V	5.50 kW	DN 80	131.0 kg	4150902
Helix V 5201-2/16/V	4.00 kW	DN 80	107.0 kg	4150901
Helix V 5201/1-2/16/V	3.00 kW	DN 80	112.0 kg	4150900
Helix V 5202/X-3/16/E/X	7.50 kW	DN 80	145.0 kg	4155453
Helix V 5202/2/X-3/16/E/X	5.50 kW	DN 80	132.0 kg	4155452
Helix V 5201/X-3/16/E/X	4.00 kW	DN 80	108.0 kg	4155451
Helix V 5201/1/X-3/16/E/X	3.00 kW	DN 80	113.0 kg	4155450
Helix V 3611-2/30/V/KS	37.00 kW	DN 65	349.0 kg	4165838
Helix V 3611/2-2/30/V/KS	30.00 kW	DN 65	348.0 kg	4165835
Helix V 3610-2/30/V/KS	30.00 kW	DN 65	344.0 kg	4165832
Helix V 3610/2-1/25/E/KS	30.00 kW	DN 65	334.0 kg	4198491
Helix V 3609-1/25/E/KS	30.00 kW	DN 65	331.0 kg	4198490
Helix V 3609/2-1/25/E/KS	30.00 kW	DN 65	331.0 kg	4198489
Helix V 3608-1/25/E/KS	22.00 kW	DN 65	256.0 kg	4198488
Helix V 3608/2-1/25/E/KS	22.00 kW	DN 65	256.0 kg	4198487
Helix V 3607-1/25/E/KS	22.00 kW	DN 65	253.0 kg	4198486
Helix V 3607/2-1/25/E/KS	18.50 kW	DN 65	253.0 kg	4198485
Helix V 3606-1/25/E/KS	18.50 kW	DN 65	223.0 kg	4198484
Helix V 3606/2-1/25/E/KS	15.00 kW	DN 65	212.0 kg	4198482
Helix V 3603/1/X-2/25/V/X	7.50 kW	DN 65	136.0 kg	4155393
Helix V 3603/2/X-2/25/V/X	7.50 kW	DN 65	136.0 kg	4155392
Helix V 3610/2-2/25/V	30.00 kW	DN 65	342.0 kg	4150773
Helix V 3609-2/25/V	30.00 kW	DN 65	339.0 kg	4150772
Helix V 3609/2-2/25/V	30.00 kW	DN 65	339.0 kg	4150771
Helix V 3608-2/25/V	22.00 kW	DN 65	265.0 kg	4150770
Helix V 3608/2-2/25/V	22.00 kW	DN 65	265.0 kg	4150769
Helix V 3607-2/25/V	22.00 kW	DN 65	262.0 kg	4150768
Helix V 3607/2-2/25/V	18.50 kW	DN 65	263.0 kg	4150767
Helix V 3606-2/25/V	18.50 kW	DN 65	260.0 kg	4150766
Helix V 3606/2-2/25/V	15.00 kW	DN 65	256.0 kg	4150764
Helix V 3605-2/25/V	15.00 kW	DN 65	224.0 kg	4150762
Helix V 3605/2-2/25/V	15.00 kW	DN 65	224.0 kg	4150760
Helix V 3604-2/25/V	11.00 kW	DN 65	171.0 kg	4150758
Helix V 3604/2-2/25/V	11.00 kW	DN 65	171.0 kg	4150756
Helix V 3603-2/25/V	9.00 kW	DN 65	151.0 kg	4150754
Helix V 3603/1-2/25/V	7.50 kW	DN 65	135.0 kg	4150752
Helix V 3603/2-2/25/V	7.50 kW	DN 65	135.0 kg	4150750
Helix V 3606-4/16/E/KS/	18.50 kW	DN 65	247.0 kg	4183411
Helix V 3606/2-4/16/E/KS/	15.00 kW	DN 65	236.0 kg	4183410
Helix V 3605-4/16/E/KS/	15.00 kW	DN 65	222.0 kg	4183409
Helix V 3605/2-4/16/E/KS/	15.00 kW	DN 65	222.0 kg	4183408
Helix V 3604-4/16/E/S/	11.00 kW	DN 65	136.0 kg	4183407

Product list: Wilo-Helix V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix V 3604/2-4/16/E/S/	11.00 kW	DN 65	136.0 kg	4183406
Helix V 3603-4/16/E/S/	9.00 kW	DN 65	124.0 kg	4183405
Helix V 3603/1-4/16/E/S/	7.50 kW	DN 65	108.0 kg	4183404
Helix V 3602-4/16/E/S/	5.50 kW	DN 65	91.0 kg	4183403
Helix V 3602/2-4/16/E/S/	4.00 kW	DN 65	85.0 kg	4183402
Helix V 3602/X-2/16/V/X	5.50 kW	DN 65	116.0 kg	4155391
Helix V 3602/1/X-2/16/V/X	5.50 kW	DN 65	116.0 kg	4155390
Helix V 3602/2/X-2/16/V/X	4.00 kW	DN 65	105.0 kg	4155389
Helix V 3601/X-2/16/V/X	3.00 kW	DN 65	101.0 kg	4155388
Helix V 3601/1/X-2/16/V/X	2.20 kW	DN 65	88.0 kg	4155387
Helix V 3606-2/16/V	18.50 kW	DN 65	260.0 kg	4150765
Helix V 3606/2-2/16/V	15.00 kW	DN 65	256.0 kg	4150763
Helix V 3605-2/16/V	15.00 kW	DN 65	224.0 kg	4150761
Helix V 3605/2-2/16/V	15.00 kW	DN 65	224.0 kg	4150759
Helix V 3604-2/16/V	11.00 kW	DN 65	171.0 kg	4150757
Helix V 3604/2-2/16/V	11.00 kW	DN 65	171.0 kg	4150755
Helix V 3603-2/16/V	9.00 kW	DN 65	151.0 kg	4150753
Helix V 3603/1-2/16/V/KS	7.50 kW	DN 65	135.0 kg	4150751
Helix V 3603/2-2/16/V	7.50 kW	DN 65	135.0 kg	4150749
Helix V 3602-2/16/V	5.50 kW	DN 65	115.0 kg	4150748
Helix V 3602/1-2/16/V	5.50 kW	DN 65	115.0 kg	4150747
Helix V 3602/2-2/16/V	4.00 kW	DN 65	104.0 kg	4150746
Helix V 3601-2/16/V	3.00 kW	DN 65	100.0 kg	4150745
Helix V 3601/1-2/16/V	2.20 kW	DN 65	87.0 kg	4150744
Helix V 3606-1/16/E/KS	18.50 kW	DN 65	223.0 kg	4198483
Helix V 3606/2-1/16/E/KS	15.00 kW	DN 65	212.0 kg	4198481
Helix V 3605-1/16/E/KS	15.00 kW	DN 65	210.0 kg	4198480
Helix V 3605/2-1/16/E/KS	15.00 kW	DN 65	210.0 kg	4198479
Helix V 3604-1/16/E/KS	11.00 kW	DN 65	149.0 kg	4198478
Helix V 3604/2-1/16/E/KS	11.00 kW	DN 65	149.0 kg	4198477
Helix V 3603-1/16/E/KS	9.00 kW	DN 65	143.0 kg	4198476
Helix V 3603/1-1/16/E/KS	7.50 kW	DN 65	143.0 kg	4198475
Helix V 3603/2-1/16/E/KS	7.50 kW	DN 65	143.0 kg	4198474
Helix V 3602-1/16/E/KS	5.50 kW	DN 65	105.0 kg	4198473
Helix V 3602/1-1/16/E/KS	5.50 kW	DN 65	105.0 kg	4198472
Helix V 3602/2-1/16/E/KS	4.00 kW	DN 65	96.0 kg	4198471
Helix V 3601-1/16/E/KS	3.00 kW	DN 65	91.0 kg	4198470
Helix V 3601/1-1/16/E/KS	2.20 kW	DN 65	80.0 kg	4198469
Helix V 2216-2/30/V/KS	22.00 kW	DN 50	265.0 kg	4165825
Helix V 2215-2/30/V/KS	18.50 kW	DN 50	262.0 kg	4165822
Helix V 2214-2/30/V/KS	18.50 kW	DN 50	259.0 kg	4165819
Helix V 2213-1/25/E/KS	18.50 kW	DN 50	248.0 kg	4198468
Helix V 2212-1/25/E/KS	15.00 kW	DN 50	235.0 kg	4198467
Helix V 2211-1/25/E/KS	15.00 kW	DN 50	233.0 kg	4198466
Helix V 2210-1/25/E/KS	15.00 kW	DN 50	231.0 kg	4198465
Helix V 2209-1/25/E/KS	11.00 kW	DN 50	143.0 kg	4198464
Helix V 2208-1/25/E/KS	11.00 kW	DN 50	141.0 kg	4198463

Product list: Wilo-Helix V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix V 2213-2/25/V	18.50 kW	DN 50	255.0 kg	4139791
Helix V 2212-2/25/V	15.00 kW	DN 50	242.0 kg	4139790
Helix V 2211-2/25/V	15.00 kW	DN 50	240.0 kg	4139789
Helix V 2210-2/25/V	15.00 kW	DN 50	238.0 kg	4139788
Helix V 2209-2/25/V	11.00 kW	DN 50	164.0 kg	4139787
Helix V 2208-2/25/V	11.00 kW	DN 50	162.0 kg	4139786
Helix V 2207-2/25/V	9.00 kW	DN 50	144.0 kg	4139784
Helix V 2206-2/25/V	7.50 kW	DN 50	126.0 kg	4139782
Helix V 2205-2/25/V	7.50 kW	DN 50	124.0 kg	4139780
Helix V 2204-2/25/V	5.50 kW	DN 50	110.0 kg	4139778
Helix V 2208-4/16/E/S/	11.00 kW	DN 50	131.0 kg	4183369
Helix V 2207-4/16/E/S/	9.00 kW	DN 50	127.0 kg	4183368
Helix V 2206-4/16/E/S/	7.50 kW	DN 50	106.0 kg	4183367
Helix V 2205-4/16/E/S/	7.50 kW	DN 50	105.0 kg	4183366
Helix V 2204-4/16/E/S/	5.50 kW	DN 50	93.0 kg	4183365
Helix V 2203-4/16/E/S/	4.00 kW	DN 50	81.0 kg	4183364
Helix V 2202-4/16/E/S/	3.00 kW	DN 50	78.0 kg	4183363
Helix V 2208-1/16/E/KS	11.00 kW	DN 50	141.0 kg	4198462
Helix V 2207-1/16/E/KS	9.00 kW	DN 50	136.0 kg	4198461
Helix V 2206-1/16/E/KS	7.50 kW	DN 50	134.0 kg	4198460
Helix V 2205-1/16/E/KS	7.50 kW	DN 50	132.0 kg	4198459
Helix V 2204-1/16/E/KS	5.50 kW	DN 50	100.0 kg	4198458
Helix V 2203-1/16/E/KS	4.00 kW	DN 50	88.0 kg	4198457
Helix V 2202-1/16/E/KS	3.00 kW	DN 50	83.0 kg	4198456
Helix V 2201-1/16/E/KS	1.50 kW	DN 50	74.0 kg	4198455
Helix V 2208-2/16/V	11.00 kW	DN 50	162.0 kg	4139785
Helix V 2207-2/16/V	9.00 kW	DN 50	144.0 kg	4139783
Helix V 2206-2/16/V	7.50 kW	DN 50	126.0 kg	4139781
Helix V 2205-2/16/V	7.50 kW	DN 50	124.0 kg	4139779
Helix V 2204-2/16/V	5.50 kW	DN 50	110.0 kg	4139777
Helix V 2203-2/16/V	4.00 kW	DN 50	95.0 kg	4139776
Helix V 2202-2/16/V	3.00 kW	DN 50	92.0 kg	4139775
Helix V 2201-2/16/V	1.50 kW	DN 50	77.0 kg	4139774
Helix V 1616-2/25/V	11.00 kW	DN 50	175.0 kg	4150673
Helix V 1613-2/25/V	9.00 kW	DN 50	177.0 kg	4150672
Helix V 1612-2/25/V	9.00 kW	DN 50	174.0 kg	4150671
Helix V 1611-2/25/V	7.50 kW	DN 50	95.0 kg	4150670
Helix V 1610-2/25/V	7.50 kW	DN 50	94.0 kg	4150669
Helix V 1609-2/25/V	7.50 kW	DN 50	92.0 kg	4150668
Helix V 1608-2/25/V	5.50 kW	DN 50	90.0 kg	4150667
Helix V 1607-2/25/V	5.50 kW	DN 50	86.0 kg	4150666
Helix V 1606-2/25/V	4.00 kW	DN 50	72.0 kg	4150665
Helix V 1605-2/25/V	4.00 kW	DN 50	61.0 kg	4150664
Helix V 1604-2/25/V	3.00 kW	DN 50	56.0 kg	4150663
Helix V 1603-2/25/V	2.20 kW	DN 50	49.0 kg	4150662
Helix V 1602-2/25/V	1.50 kW	DN 50	47.0 kg	4150661
Helix V 1601-2/25/V	0.75 kW	DN 50	41.0 kg	4150660

Product list: Wilo-Helix V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix V 1616-1/25/E	11.00 kW	DN 50	175.0 kg	4141166
Helix V 1613-1/25/E	9.00 kW	DN 50	177.0 kg	4141163
Helix V 1612-1/25/E	9.00 kW	DN 50	174.0 kg	4141162
Helix V 1611-1/25/E	7.50 kW	G 2	95.0 kg	4141161
Helix V 1610-1/25/E	7.50 kW	G 2	94.0 kg	4141159
Helix V 1609-1/25/E	7.50 kW	G 2	92.0 kg	4141157
Helix V 1608-1/25/E/KS	5.50 kW	G 2	90.0 kg	4141155
Helix V 1607-1/25/E	5.50 kW	G 2	86.0 kg	4141153
Helix V 1606-1/25/E	4.00 kW	G 2	72.0 kg	4141151
Helix V 1605-1/25/E	4.00 kW	G 2	61.0 kg	4141149
Helix V 1611-1/16/E/KS	7.50 kW	G 2	95.0 kg	4141178
Helix V 1610-1/16/E/KS	7.50 kW	G 2	94.0 kg	4141177
Helix V 1609-1/16/E/KS	7.50 kW	G 2	92.0 kg	4141176
Helix V 1608-1/16/E/S	5.50 kW	G 2	75.0 kg	4201334
Helix V 1607-1/16/E/S	5.50 kW	G 2	74.0 kg	4201331
Helix V 1606-1/16/E/S	4.00 kW	G 2	56.0 kg	4201328
Helix V 1605-1/16/E/S	4.00 kW	G 2	55.0 kg	4201325
Helix V 1604-1/16/E/S	3.00 kW	G 2	53.0 kg	4201321
Helix V 1603-1/16/E/S	2.20 kW	G 2	44.8 kg	4201316
Helix V 1602-1/16/E/S	1.50 kW	G 2	42.7 kg	4201313
Helix V 1611 FF240-1/16/E/KS	7.50 kW	G 2	103.0 kg	4182516
Helix V 1610 FF240-1/16/E/KS	7.50 kW	G 2	102.0 kg	4182515
Helix V 1609 FF240-1/16/E/KS	7.50 kW	G 2	100.0 kg	4182514
Helix V 1608-1/16/E	5.50 kW	G 2	90.0 kg	4141154
Helix V 1607-1/16/E	5.50 kW	G 2	86.0 kg	4141152
Helix V 1606-1/16/E	4.00 kW	G 2	72.0 kg	4141150
Helix V 1605-1/16/E	4.00 kW	G 2	61.0 kg	4141148
Helix V 1604-1/16/E	3.00 kW	G 2	60.0 kg	4141147
Helix V 1603-1/16/E	2.20 kW	G 2	49.0 kg	4141146
Helix V 1602-1/16/E	1.50 kW	G 2	47.0 kg	4141145
Helix V 1601-1/16/E	0.75 kW	G 2	41.0 kg	4141144
Helix V 1021-2/25/V	7.50 kW	DN 40	127.0 kg	4150594
Helix V 1019-2/25/V	7.50 kW	DN 40	125.0 kg	4150592
Helix V 1017-2/25/V	7.50 kW	DN 40	123.0 kg	4150590
Helix V 1015-2/25/V	5.50 kW	DN 40	93.0 kg	4150588
Helix V 1013-2/25/V	5.50 kW	DN 40	91.0 kg	4150586
Helix V 1012-2/25/V	5.50 kW	DN 40	90.0 kg	4150585
Helix V 1011-2/25/V	4.00 kW	DN 40	77.0 kg	4150584
Helix V 1010-2/25/V	4.00 kW	DN 40	76.0 kg	4150583
Helix V 1009-2/25/V	4.00 kW	DN 40	72.0 kg	4150582
Helix V 1008-2/25/V	3.00 kW	DN 40	61.0 kg	4150581
Helix V 1007-2/25/V	3.00 kW	DN 40	60.0 kg	4150580
Helix V 1006-2/25/V	2.20 kW	DN 40	49.0 kg	4150577
Helix V 1005-2/25/V	2.20 kW	DN 40	48.0 kg	4150576
Helix V 1004-2/25/V	1.50 kW	DN 40	46.0 kg	4150575
Helix V 1003-2/25/V	1.10 kW	DN 40	40.0 kg	4150574
Helix V 1002-2/25/V	0.75 kW	DN 40	35.0 kg	4150573

Product list: Wilo-Helix V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix V 1001-2/25/V	0.55 kW	DN 40	30.0 kg	4150572
Helix V 1021-1/25/E/KS	7.50 kW	DN 40	127.0 kg	4150569
Helix V 1019-1/25/E/KS	7.50 kW	DN 40	125.0 kg	4150567
Helix V 1017-1/25/E/KS	7.50 kW	DN 40	123.0 kg	4150565
Helix V 1015-1/25/E/KS	5.50 kW	DN 40	93.0 kg	4150563
Helix V 1013-1/25/E/KS	5.50 kW	G ½	91.0 kg	4150561
Helix V 1012-1/25/E/KS	5.50 kW	G ½	90.0 kg	4150559
Helix V 1011-1/25/E/KS	4.00 kW	G ½	77.0 kg	4150557
Helix V 1010-1/25/E/KS	4.00 kW	G ½	76.0 kg	4150555
Helix V 1009-1/25/E/KS	4.00 kW	G ½	72.0 kg	4150553
Helix V 1008-1/25/E/KS	3.00 kW	G ½	61.0 kg	4150551
Helix V 1007-1/25/E/KS	3.00 kW	G ½	60.0 kg	4150549
Helix V 1006-1/25/E/KS	2.20 kW	G ½	49.0 kg	4150547
Helix V 1005-1/25/E/KS	2.20 kW	G ½	48.0 kg	4150545
Helix V 1013-1/16/E/S	5.50 kW	G ½	80.0 kg	4201310
Helix V 1012-1/16/E/S	5.50 kW	G ½	79.0 kg	4201308
Helix V 1011-1/16/E/S	4.00 kW	G ½	73.0 kg	4201306
Helix V 1010-1/16/E/S	4.00 kW	G ½	57.0 kg	4201304
Helix V 1009-1/16/E/S	4.00 kW	G ½	57.0 kg	4201302
Helix V 1008-1/16/E/S	3.00 kW	G ½	55.0 kg	4201299
Helix V 1007-1/16/E/S	3.00 kW	G ½	54.0 kg	4201296
Helix V 1006-1/16/E/S	2.20 kW	G ½	46.1 kg	4201293
Helix V 1005-1/16/E/S	2.20 kW	G ½	45.1 kg	4201290
Helix V 1004-1/16/E/S	1.50 kW	G ½	43.2 kg	4201287
Helix V 1003-1/16/E/S	1.10 kW	G ½	32.3 kg	4201284
Helix V 1002-1/16/E/S	0.75 kW	G ½	30.5 kg	4201281
Helix V 1013-1/16/E	5.50 kW	G ½	91.0 kg	4150560
Helix V 1012-1/16/E	5.50 kW	G ½	90.0 kg	4150558
Helix V 1011-1/16/E	4.00 kW	G ½	77.0 kg	4150556
Helix V 1010-1/16/E	4.00 kW	G ½	76.0 kg	4150554
Helix V 1009-1/16/E	4.00 kW	G ½	72.0 kg	4150552
Helix V 1008-1/16/E	3.00 kW	G ½	61.0 kg	4150550
Helix V 1007-1/16/E	3.00 kW	G ½	60.0 kg	4150548
Helix V 1006-1/16/E	2.20 kW	G ½	49.0 kg	4150546
Helix V 1005-1/16/E	2.20 kW	G ½	48.0 kg	4150544
Helix V 1004-1/16/E	1.50 kW	G ½	46.0 kg	4150543
Helix V 1003-1/16/E	1.10 kW	G ½	40.0 kg	4150542
Helix V 1002-1/16/E	0.75 kW	G ½	35.0 kg	4150541
Helix V 1001-1/16/E/KS	0.55 kW	G ½	30.0 kg	4150540
Helix V 627-2/25/V/KS	5.50 kW	DN 32	129.0 kg	4156083
Helix V 625-2/25/V/KS	5.50 kW	DN 32	126.0 kg	4156082
Helix V 623-2/25/V/KS	5.50 kW	DN 32	125.0 kg	4156081
Helix V 621-2/25/V/KS	5.50 kW	DN 32	124.0 kg	4156080
Helix V 620-2/25/V/KS	4.00 kW	DN 32	110.0 kg	4156079
Helix V 618-2/25/V/KS	4.00 kW	DN 32	81.0 kg	4156078
Helix V 616-2/25/V/KS	4.00 kW	DN 32	79.0 kg	4156077
Helix V 615-2/25/V/KS	3.00 kW	DN 32	82.0 kg	4156076

Product list: Wilo-Helix V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix V 614-2/25/V/KS	3.00 kW	DN 32	80.0 kg	4156075
Helix V 613-2/25/V/KS	3.00 kW	DN 32	806.3 kg	4156074
Helix V 612-2/25/V/KS	3.00 kW	DN 32	79.0 kg	4156073
Helix V 611-2/25/V/KS	2.20 kW	DN 32	68.0 kg	4156072
Helix V 610-2/25/V/KS	2.20 kW	DN 32	53.0 kg	4156071
Helix V 609-2/25/V/KS	2.20 kW	DN 32	53.0 kg	4156070
Helix V 608-2/25/V/KS	1.50 kW	DN 32	50.0 kg	4156069
Helix V 607-2/25/V/KS	1.50 kW	DN 32	49.0 kg	4156068
Helix V 606-2/25/V/KS	1.10 kW	DN 32	41.0 kg	4156067
Helix V 605-2/25/V/KS	1.10 kW	DN 32	40.0 kg	4156066
Helix V 604-2/25/V/KS	0.75 kW	DN 32	38.0 kg	4156065
Helix V 603-2/25/V/KS	0.55 kW	DN 32	32.0 kg	4156064
Helix V 602-2/25/V/KS	0.55 kW	DN 32	29.0 kg	4156063
Helix V 601-2/25/V/KS	0.37 kW	DN 32	27.0 kg	4156062
Helix V 627-1/25/E/KS	5.50 kW	DN 32	129.0 kg	4156061
Helix V 625-1/25/E/KS	5.50 kW	DN 32	126.0 kg	4156060
Helix V 623-1/25/E/KS	5.50 kW	DN 32	125.0 kg	4156059
Helix V 621-1/25/E/KS	5.50 kW	DN 32	124.0 kg	4156058
Helix V 620-1/25/E/KS	4.00 kW	DN 32	110.0 kg	4156057
Helix V 618-1/25/E/KS	4.00 kW	DN 32	81.0 kg	4156056
Helix V 616-1/25/E/KS	4.00 kW	G 1¼	79.0 kg	4156055
Helix V 615-1/25/E/KS	3.00 kW	G 1¼	82.0 kg	4156053
Helix V 614-1/25/E/KS	3.00 kW	G 1¼	80.0 kg	4156051
Helix V 613-1/25/E/KS	3.00 kW	G 1¼	80.0 kg	4156049
Helix V 612-1/25/E/KS	3.00 kW	G 1¼	79.0 kg	4156047
Helix V 611-1/25/E/KS	2.20 kW	G 1¼	68.0 kg	4156045
Helix V 610-1/25/E/KS	2.20 kW	G 1¼	53.0 kg	4156043
Helix V 609-1/25/E/KS	2.20 kW	G 1¼	53.0 kg	4156041
Helix V 608-1/25/E/KS	1.50 kW	G 1¼	50.0 kg	4156039
Helix V 607-1/25/E/KS	1.50 kW	G 1¼	49.0 kg	4156037
Helix V 616-1/16/E/S	4.00 kW	G 1¼	72.0 kg	4201436
Helix V 615-1/16/E/S	3.00 kW	G 1¼	71.0 kg	4201434
Helix V 614-1/16/E/S	3.00 kW	G 1¼	70.0 kg	4201432
Helix V 613-1/16/E/S	3.00 kW	G 1¼	70.0 kg	4201430
Helix V 612-1/16/E/S	3.00 kW	G 1¼	55.0 kg	4201428
Helix V 611-1/16/E/S	2.20 kW	G 1¼	47.2 kg	4201426
Helix V 610-1/16/E/S	2.20 kW	G 1¼	45.1 kg	4201423
Helix V 609-1/16/E/S	2.20 kW	G 1¼	45.1 kg	4201420
Helix V 608-1/16/E/S	1.50 kW	G 1¼	43.3 kg	4201417
Helix V 607-1/16/E/S	1.50 kW	G 1¼	42.5 kg	4201414
Helix V 606-1/16/E/S	1.10 kW	G 1¼	36.3 kg	4201411
Helix V 605-1/16/E/S	1.10 kW	G 1¼	35.5 kg	4201408
Helix V 604-1/16/E/S	0.75 kW	G 1¼	29.4 kg	4201405
Helix V 603-1/16/E/S	0.55 kW	G 1¼	23.0 kg	4201402
Helix V 602-1/16/E/S	0.55 kW	G 1¼	22.2 kg	4201400
Helix V 616-1/16/E/KS	4.00 kW	G 1¼	77.0 kg	4156054
Helix V 615-1/16/E/KS	3.00 kW	G 1¼	80.0 kg	4156052

Product list: Wilo-Helix V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix V 614-1/16/E/KS	3.00 kW	G 1¼	78.0 kg	4156050
Helix V 613-1/16/E/KS	3.00 kW	G 1¼	78.0 kg	4156048
Helix V 612-1/16/E/KS	3.00 kW	G 1¼	77.0 kg	4156046
Helix V 611-1/16/E/KS	2.20 kW	G 1¼	53.0 kg	4156044
Helix V 610-1/16/E/KS	2.20 kW	G 1¼	51.0 kg	4156042
Helix V 609-1/16/E/KS	2.20 kW	G 1¼	51.0 kg	4156040
Helix V 608-1/16/E/KS	1.50 kW	G 1¼	48.0 kg	4156038
Helix V 607-1/16/E/KS	1.50 kW	G 1¼	45.0 kg	4156036
Helix V 606-1/16/E/KS	1.10 kW	G 1¼	40.0 kg	4156035
Helix V 605-1/16/E/KS	1.10 kW	G 1¼	39.0 kg	4156034
Helix V 604-1/16/E/KS	0.75 kW	G 1¼	34.0 kg	4156033
Helix V 603-1/16/E/KS	0.55 kW	G 1¼	29.0 kg	4156032
Helix V 602-1/16/E/KS	0.55 kW	G 1¼	28.0 kg	4156031
Helix V 601-1/16/E/KS	0.37 kW	G 1¼	26.0 kg	4156030
Helix V 422-1/25/E/KS	3.00 kW	DN 25	79.0 kg	4193310
Helix V 403-2/25/V/KS	0.37 kW	DN 25	27.0 kg	4193998
Helix V 431-2/25/V/KS	4.00 kW	DN 25	108.0 kg	4160569
Helix V 429-2/25/V/KS	4.00 kW	DN 25	107.0 kg	4160568
Helix V 426-2/25/V/KS	4.00 kW	DN 25	75.0 kg	4160567
Helix V 424-2/25/V/KS	3.00 kW	DN 25	80.0 kg	4160566
Helix V 422-2/25/V/KS	3.00 kW	DN 25	79.0 kg	4160565
Helix V 420-2/25/V/KS	3.00 kW	DN 25	78.0 kg	4160564
Helix V 418-2/25/V/KS	2.20 kW	DN 25	54.0 kg	4160563
Helix V 416-2/25/V/KS	2.20 kW	DN 25	53.0 kg	4160562
Helix V 414-2/25/V/KS	2.20 kW	DN 25	52.0 kg	4160561
Helix V 413-2/25/V/KS	2.20 kW	DN 25	52.0 kg	4160560
Helix V 412-2/25/V/KS	1.50 kW	DN 25	49.0 kg	4160559
Helix V 411-2/25/V/KS	1.50 kW	DN 25	46.0 kg	4160558
Helix V 410-2/25/V/KS	1.50 kW	DN 25	46.0 kg	4160557
Helix V 409-2/25/V/KS	1.10 kW	DN 25	41.0 kg	4160556
Helix V 408-2/25/V/KS	1.10 kW	DN 25	41.0 kg	4160555
Helix V 407-2/25/V/KS	1.10 kW	DN 25	39.0 kg	4160554
Helix V 406-2/25/V/KS	0.75 kW	DN 25	37.0 kg	4160553
Helix V 405-2/25/V/KS	0.75 kW	DN 25	36.0 kg	4160552
Helix V 404-2/25/V/KS	0.55 kW	DN 25	29.0 kg	4160551
Helix V 402-2/25/V/KS	0.37 kW	DN 25	27.0 kg	4160549
Helix V 431-1/25/E/KS	4.00 kW	DN 25	108.0 kg	4160548
Helix V 429-1/25/E/KS	4.00 kW	DN 25	76.0 kg	4160547
Helix V 426-1/25/E/KS	4.00 kW	DN 25	75.0 kg	4160546
Helix V 424-1/25/E/KS	3.00 kW	DN 25	80.0 kg	4160545
Helix V 420-1/25/E/KS	3.00 kW	G 1½	78.0 kg	4160543
Helix V 418-1/25/E/KS	2.20 kW	G 1½	54.0 kg	4160541
Helix V 416-1/25/E/KS	2.20 kW	G 1½	53.0 kg	4160539
Helix V 414-1/25/E/KS	2.20 kW	G 1½	52.0 kg	4160537
Helix V 413-1/25/E/KS	2.20 kW	G 1½	52.0 kg	4160535
Helix V 412-1/25/E/KS	1.50 kW	G 1½	49.0 kg	4160533
Helix V 411-1/25/E/KS	1.50 kW	G 1½	46.0 kg	4160531

Product list: Wilo-Helix V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix V 410-1/25/E/KS	1.50 kW	G 1½	46.0 kg	4160529
Helix V 409-1/25/E/KS	1.10 kW	G 1½	41.0 kg	4160527
Helix V 408-1/25/E/KS	1.10 kW	G 1½	41.0 kg	4160525
Helix V 420-1/16/E/S	3.00 kW	G 1½	69.0 kg	4201399
Helix V 418-1/16/E/S	2.20 kW	G 1½	46.9 kg	4201397
Helix V 416-1/16/E/S	2.20 kW	G 1½	45.8 kg	4201395
Helix V 414-1/16/E/S	2.20 kW	G 1½	44.9 kg	4201393
Helix V 413-1/16/E/S	2.20 kW	G 1½	44.8 kg	4201392
Helix V 412-1/16/E/S	1.50 kW	G 1½	42.8 kg	4201390
Helix V 411-1/16/E/S	1.50 kW	G 1½	42.4 kg	4201388
Helix V 410-1/16/E/S	1.50 kW	G 1½	41.9 kg	4201385
Helix V 409-1/16/E/S	1.10 kW	G 1½	35.9 kg	4201382
Helix V 408-1/16/E/S	1.10 kW	G 1½	35.4 kg	4201380
Helix V 407-1/16/E/S	1.10 kW	G 1½	34.9 kg	4201377
Helix V 406-1/16/E/S	0.75 kW	G 1½	29.1 kg	4201374
Helix V 405-1/16/E/S	0.75 kW	G 1½	28.6 kg	4201372
Helix V 404-1/16/E/S	0.55 kW	G 1½	22.4 kg	4201369
Helix V 403-1/16/E/S	0.37 kW	G 1½	20.9 kg	4201366
Helix V 402-1/16/E/S	0.37 kW	G 1½	20.4 kg	4201364
Helix V 408-1/16/E/KS	1.10 kW	G 1½	38.0 kg	4193858
Helix V 420-1/16/E/KS	3.00 kW	G 1½	76.0 kg	4160542
Helix V 418-1/16/E/KS	2.20 kW	G 1½	52.0 kg	4160540
Helix V 416-1/16/E/KS	2.20 kW	G 1½	51.0 kg	4160538
Helix V 414-1/16/E/KS	2.20 kW	G 1½	50.0 kg	4160536
Helix V 413-1/16/E/KS	2.20 kW	G 1½	50.0 kg	4160534
Helix V 412-1/16/E/KS	1.50 kW	G 1½	47.0 kg	4160532
Helix V 411-1/16/E/KS	1.50 kW	G 1½	44.0 kg	4160530
Helix V 410-1/16/E/KS	1.50 kW	G 1½	44.0 kg	4160528
Helix V 409-1/16/E/KS	1.10 kW	G 1½	39.0 kg	4160526
Helix V 407-1/16/E/KS	1.10 kW	G 1½	38.0 kg	4160523
Helix V 406-1/16/E/KS	0.75 kW	G 1½	36.0 kg	4160522
Helix V 405-1/16/E/KS	0.75 kW	G 1½	35.0 kg	4160521
Helix V 404-1/16/E/KS	0.55 kW	G 1½	28.0 kg	4160520
Helix V 403-1/16/E/KS	0.37 kW	G 1½	26.0 kg	4160519
Helix V 402-1/16/E/KS	0.37 kW	G 1½	26.0 kg	4160518
Helix V 233-2/25/V/KS	3.00 kW	DN 25	114.0 kg	4161756
Helix V 231-2/25/V/KS	3.00 kW	DN 25	85.0 kg	4161755
Helix V 229-2/25/V/KS	2.20 kW	DN 25	75.0 kg	4161754
Helix V 226-2/25/V/KS	2.20 kW	DN 25	73.0 kg	4161753
Helix V 224-2/25/V/KS	2.20 kW	DN 25	72.0 kg	4161752
Helix V 222-2/25/V/KS	2.20 kW	DN 25	71.0 kg	4161751
Helix V 220-2/25/V/KS	2.20 kW	DN 25	69.0 kg	4161750
Helix V 218-2/25/V/KS	1.50 kW	DN 25	53.0 kg	4161749
Helix V 216-2/25/V/KS	1.50 kW	DN 25	52.0 kg	4161748
Helix V 214-2/25/V/KS	1.10 kW	DN 25	47.0 kg	4161747
Helix V 213-2/25/V/KS	1.10 kW	DN 25	47.0 kg	4161746
Helix V 212-2/25/V/KS	1.10 kW	DN 25	46.0 kg	4161745

Product list: Wilo-Helix V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix V 211-2/25/V/KS	1.10 kW	DN 25	43.0 kg	4161744
Helix V 210-2/25/V/KS	0.75 kW	DN 25	41.0 kg	4161743
Helix V 209-2/25/V/KS	0.75 kW	DN 25	40.0 kg	4161742
Helix V 208-2/25/V/KS	0.75 kW	DN 25	40.0 kg	4161741
Helix V 207-2/25/V/KS	0.55 kW	DN 25	34.0 kg	4161740
Helix V 206-2/25/V/KS	0.55 kW	DN 25	33.0 kg	4161739
Helix V 205-2/25/V/KS	0.55 kW	DN 25	33.0 kg	4161738
Helix V 204-2/25/V/KS	0.37 kW	DN 25	28.0 kg	4161737
Helix V 203-2/25/V/KS	0.37 kW	DN 25	28.0 kg	4161736
Helix V 202-2/25/V/KS	0.37 kW	DN 25	27.0 kg	4161735
Helix V 233-1/25/E/KS	3.00 kW	DN 25	114.0 kg	4161734
Helix V 231-1/25/E/KS	3.00 kW	DN 25	85.0 kg	4161733
Helix V 229-1/25/E/KS	2.20 kW	DN 25	75.0 kg	4161732
Helix V 226-1/25/E/KS	2.20 kW	DN 25	73.0 kg	4161731
Helix V 224-1/25/E/KS	2.20 kW	DN 25	72.0 kg	4161730
Helix V 222-1/25/E/KS	2.20 kW	DN 25	71.0 kg	4161729
Helix V 220-1/25/E/KS	2.20 kW	G 1½	69.0 kg	4161728
Helix V 218-1/25/E/KS	1.50 kW	G 1½	53.0 kg	4161726
Helix V 216-1/25/E/KS	1.50 kW	G 1½	52.0 kg	4161724
Helix V 214-1/25/E/KS	1.10 kW	G 1½	47.0 kg	4161722
Helix V 213-1/25/E/KS	1.10 kW	G 1½	47.0 kg	4161720
Helix V 212-1/25/E/KS	1.10 kW	G 1½	46.0 kg	4161718
Helix V 211-1/25/E/KS	1.10 kW	G 1½	43.0 kg	4161716
Helix V 210-1/25/E/KS	0.75 kW	G 1½	41.0 kg	4161714
Helix V 209-1/25/E/KS	0.75 kW	G 1½	40.0 kg	4161712
Helix V 220-1/16/E/S	2.20 kW	G 1½	47.7 kg	4201363
Helix V 218-1/16/E/S	1.50 kW	G 1½	45.8 kg	4201362
Helix V 216-1/16/E/S	1.50 kW	G 1½	44.8 kg	4201361
Helix V 214-1/16/E/S	1.10 kW	G 1½	38.3 kg	4201360
Helix V 213-1/16/E/S	1.10 kW	G 1½	38.2 kg	4201359
Helix V 212-1/16/E/S	1.10 kW	G 1½	37.3 kg	4201357
Helix V 211-1/16/E/S	1.10 kW	G 1½	36.9 kg	4201355
Helix V 210-1/16/E/S	0.75 kW	G 1½	35.5 kg	4201353
Helix V 209-1/16/E/S	0.75 kW	G 1½	35.1 kg	4201351
Helix V 208-1/16/E/S	0.75 kW	G 1½	34.6 kg	4201349
Helix V 207-1/16/E/S	0.55 kW	G 1½	23.9 kg	4201347
Helix V 206-1/16/E/S	0.55 kW	G 1½	23.3 kg	4201345
Helix V 205-1/16/E/S	0.55 kW	G 1½	22.9 kg	4201343
Helix V 204-1/16/E/S	0.37 kW	G 1½	21.3 kg	4201341
Helix V 203-1/16/E/S	0.37 kW	G 1½	20.8 kg	4201339
Helix V 202-1/16/E/S	0.37 kW	G 1½	20.4 kg	4201337
Helix V 220-1/16/E/KS	2.20 kW	G 1½	67.0 kg	4161727
Helix V 218-1/16/E/KS	1.50 kW	G 1½	51.0 kg	4161725
Helix V 216-1/16/E/KS	1.50 kW	G 1½	50.0 kg	4161723
Helix V 214-1/16/E/KS	1.10 kW	G 1½	45.0 kg	4161721
Helix V 213-1/16/E/KS	1.10 kW	G 1½	45.0 kg	4161719
Helix V 212-1/16/E/KS	1.10 kW	G 1½	44.0 kg	4161717

Product list: Wilo-Helix V

Product description	Rated power P_2	Pipe connection	Gross weight, approx. m	Article number
Helix V 211-1/16/E/KS	1.10 kW	G 1½	41.0 kg	4161715
Helix V 210-1/16/E/KS	0.75 kW	G 1½	39.0 kg	4161713
Helix V 209-1/16/E/KS	0.75 kW	G 1½	38.0 kg	4161711
Helix V 208-1/16/E/KS	0.75 kW	G 1½	38.0 kg	4161710
Helix V 207-1/16/E/KS	0.55 kW	G 1½	33.0 kg	4161709
Helix V 206-1/16/E/KS	0.55 kW	G 1½	32.0 kg	4161708
Helix V 205-1/16/E/KS	0.55 kW	G 1½	32.0 kg	4161707
Helix V 204-1/16/E/KS	0.37 kW	G 1½	27.0 kg	4161706
Helix V 203-1/16/E/KS	0.37 kW	G 1½	27.0 kg	4161705
Helix V 202-1/16/E/KS	0.37 kW	G 1½	26.0 kg	4161704