

Data sheet

Hydraulic data

Maximum operating pressure P_N	10 bar
Max. fluid temperature $T_{\max}$	70 °C
Min. fluid temperature $T_{\min}$	2 °C
Min. ambient temperature $T_{\min}$	0 °C
Max. ambient temperature $T_{\max}$	40 °C
Temperature range at max. ambient temperature +40 °C T	+2...+70

Motor data

Mains connection	1~230 V, 50/60 Hz
Rated power P_2	0,02 kW
Rated current I_N	0,26 A
Min. speed $n_{\min}$	1200 1/min
Max. speed $n_{\max}$	3500 1/min
Power consumption $P_{1\min}$	3 W
Power consumption $P_{1\max}$	25 W
Interference emission	EN 61000-6-3
Interference immunity	EN 61000-6-2
Electromagnetic compatibility	EN 61800-3
Insulation class	F
Protection class motor	IPX4D
Speed control	Frequency converter
Motor protection	no


Materials

Pump housing	Stainless steel
Impeller	PPE-GF30
Shaft	Stainless steel
Bearing	Carbon, synthetic resin-impregnated

Installation dimensions


Pipe connection on the suction side DNs	G 1½
Pipe connection on the pressure side DNd	G 1½
Port-to-port length $L0$	180 mm


Pump curves

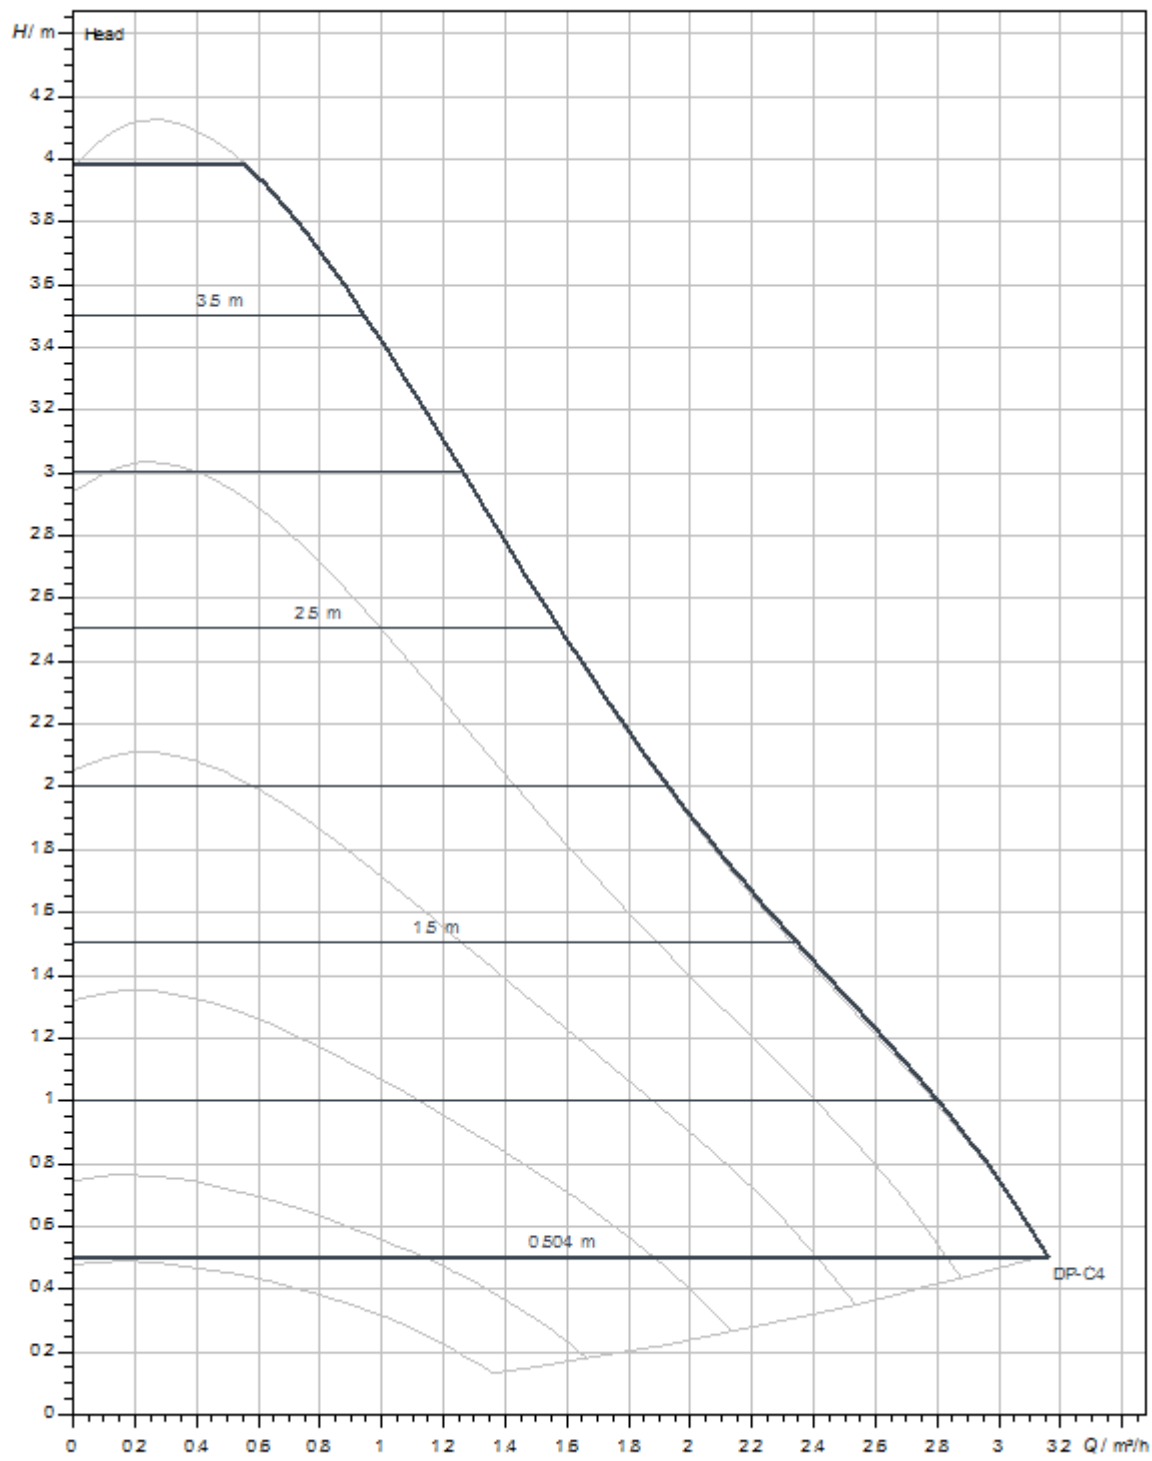

Dimensions and dimensions drawings

4216472_ConGraph_stratos_pico_z_25_180_dim_01_1405

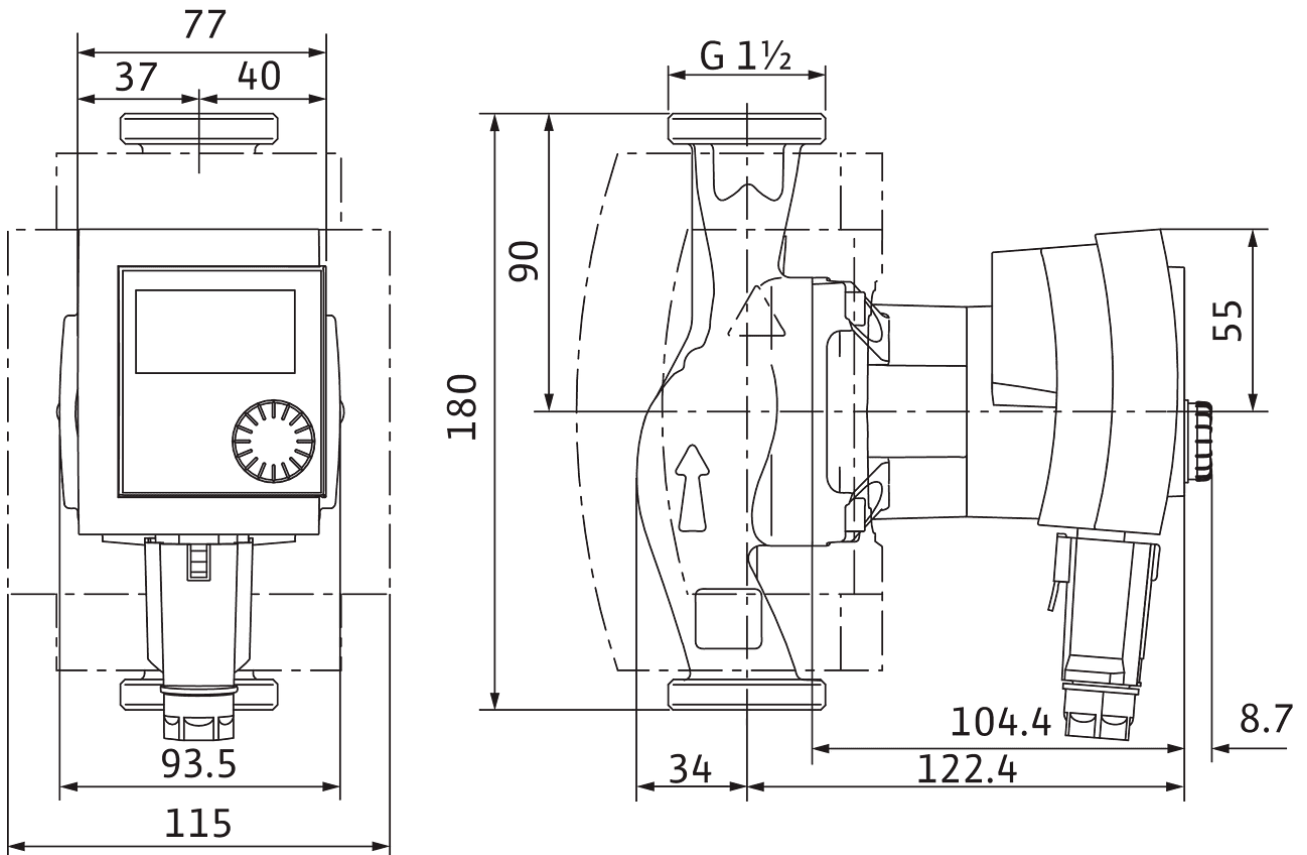

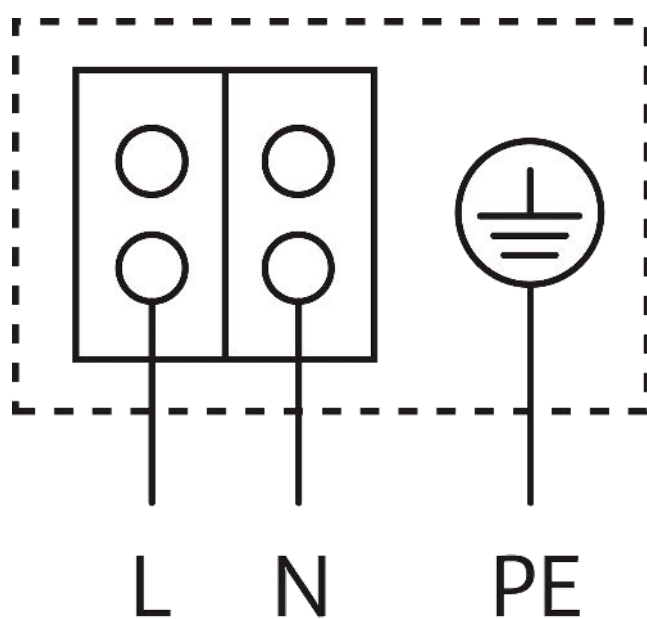Wiring diagram

Blocking current-proof motor

Single-phase motor (EM) 2-pole - 1~230 V, 50 Hz